


Drift Eliminator

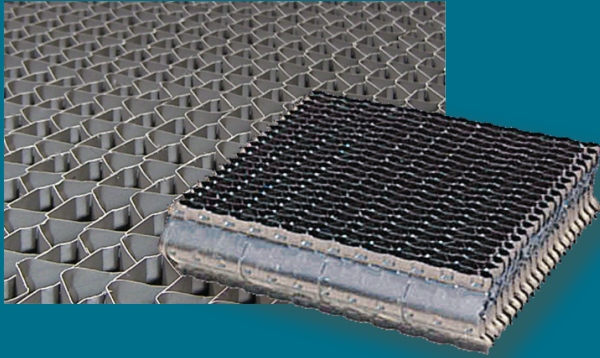

Replacement solution to keep
Eurovent, CTI & FM unit
certification

High mechanical strength

Quick shipment



Efficient

Three changes in air direction to assure moisture removal in air-stream. Maximum drift lost not to exceed 0.001% of recirculated water rate.



Custom design

Guaranteed to fit in all forced & induced draft units, regardless of manufacturer. Also available with frame (FeZn or SST)



Easy installation

- Light weight, easy to handle.
- Cut to fit, no scrap: Saving on labour hours



Non-corrosive

Constructed of inert PVC, resistant to chemical degrade

Product code	EDE-001
Material	Self extinguishing PVC meets CTI standard 136 & ASTM standard E-84
Operating temperatures	Standard -5°C to +60°C High temperature -5°C to +75°C (= option HPVC)
Size	Length max. 3200mm - width max. 600mm - depth 140mm
Thickness before forming	450 micron
Breakthrough velocity	6.01m/s
Max. distance between supports	1400mm

